


LINKAGE




LH

RH

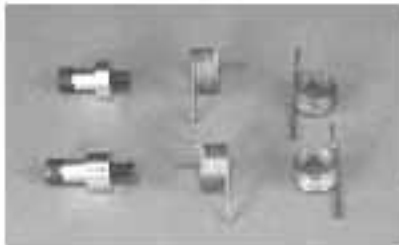

KINSLER SAFETY RETURN SPRINGS AND STOP BOSS:

- 5507-S Stop boss, short style, aluminum, for use with stop #5496 and #5497, includes 10-32 grade-8 bolt for mounting.
- 5507-L Stop boss, long style, aluminum, for use with stop #5496 and #5497, includes 10-32 grade-8 bolt for mounting.
- 7713-R Safety return spring, standard tension, right hand.
- 7713-L Safety return spring, standard tension, left hand.
- 7715-R Safety return spring, light tension, right hand.
- 7715-L Safety return spring, light tension, left hand.

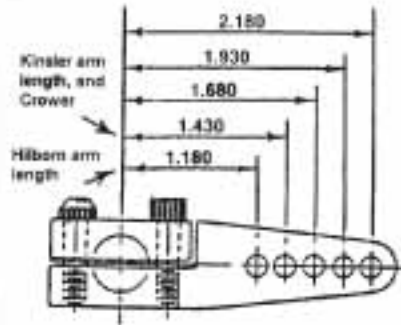

Kinsler split style 2-piece arms and stops are useful anywhere, especially when an arm or stop needs to be put in the center of a manifold. Throttle shafts don't have to be removed for installation.

K-TYPE TWO PIECE DOUBLE THROTTLE ARMS:

- 5579 1.180" to 2.180" c-c, 5/16" shaft.
- 5580 1.180" to 2.180" c-c, 3/8" shaft.
- 5581 1.180" to 2.180" c-c, 1/2" shaft.



#5572 #5571 #5490 #5582 #5583



#5575 #5493 #5588 #5589

K-TYPE TWO PIECE THROTTLE ARMS:

- 5520 5/16" shaft.
- 5521 3/8" shaft.
- 5522 1/2" shaft.

K-TYPE ONE PIECE THROTTLE ARMS:

FOR 5/16" DIAMETER SHAFT :

- 5490 1.430" c-c
- 5492 1.750" c-c
- 5571 1.0" c-c, machined for barrel type cable end (.230" O.D.).
- 5582 1.430" c-c, .200" thick right side.
- 5583 1.430" c-c, .200" thick left side.
- 5586 1.750" c-c, .200" thick right side.
- 5587 1.750" c-c, .200" thick left side.

FOR 3/8" DIAMETER SHAFT :

- 5491 1.430" c-c
- 5493 1.750" c-c
- 5572 1.0" c-c
- 5573 1.0" c-c, machined for barrel type cable end (.230" O.D.).
- 5575 1.430" c-c, machined for barrel type cable end (.230" O.D.).
- 5584 1.430" c-c, .200" thick right side.
- 5585 1.430" c-c, .200" thick left side.
- 5588 1.750" c-c, .200" thick right side.
- 5589 1.750" c-c, .200" thick left side.



H-TYPE ARMS AND STOPS:

- 5592 Throttle arm, 1.180" c-c, 5/16" shaft.
- 5593 Throttle arm, 1.180" c-c, 3/8" shaft.
- 5498 Throttle stop, 5/16" shaft.
- 5499 Throttle stop, 3/8" shaft.

E-TYPE ARMS AND STOPS:

- 5494 Throttle arm, 1.280" c-c, 5/16" serrated shaft.
- 5508 Throttle arm, 1.280" c-c, 3/8" serrated shaft.
- 5495 Throttle arm, 1.280" and 1.710" c-c, 5/16" serrated shaft.
- 5516 Double end throttle arm, 1.30", 1.71", 2.17", 2.63" X 1.31" c-c, 3/8" shaft.
- 5517 Double end throttle arm, 1.30" and 1.71" X 1.31" c-c, 5/16" serrated shaft.
- 5518 Double end throttle arm, 1.30" and 1.71" X 1.31" c-c, 3/8" serrated shaft.
- 5519 Double end throttle arm, 1.30" and 1.71" X 1.31" c-c, 7/16" serrated shaft.
- 5500 Throttle stop, 5/16" serrated shaft.
- 5504 Throttle stop, 3/8" serrated shaft.
- 5505 Throttle stop, 7/16" serrated shaft.
- 5509 Thumb screw, 10-24 thread with 5/8" diameter knob.