

# EFI PRESSURE RELIEF VALVES AND ACCESSORIES

## DUAL PRESSURE RELIEF VALVE ADAPTER

This assembly uses two stock type low cost relief valves for higher flow capacity.



Dual pressure relief valve adapter shown with polished finish

- 10750 Dual pressure relief mounting rail, extruded aluminum, 8 AN female inlet & outlet ports, fits valves #10701, #10702, #10703, #10710, and #10711
- 10761 Labor to polish #10750 dual pressure relief mounting rail
- 6043 Fitting, 8 AN male flare x 8 AN male + o-ring, hard anodized
- 6044 Fitting, 6 AN male flare x 8 AN male + o-ring, hard anodized
- 6047 Bulkhead, 8 AN male + o-ring x 8 AN male + nut & o-ring, plated steel
- 6048 Bulkhead, 8 AN male + o-ring x 6 AN male + nut & o-ring, plated steel

## K-140 MOUNTING BRACKET

Black anodized billet aluminum, available with rubber vibration isolation mounts



- 12085 Mounting bracket, billet aluminum, black anodized
- 12086 Set of four rubber vibration isolation mounts

## VACUUM/BOOST REFERENCE KIT



- 10900 Vacuum signal junction block assembly, blue anodized billet aluminum with (8) #10902 - 1/8" barbed inlet fittings and one 3/16" barbed outlet fitting
- 10901 Vacuum signal block ONLY, blue anodized billet aluminum, with (8) 10-32 female ports and (2) 1/8" NPT female ports
- 10902 Barbed fitting, 10-32 male thread with gasket x 1/8" barb
- 10904 Hose, black fluorosilicone, for #10902 fitting, temp. range -80 to 450°F, 1/8" I.D., 10'
- 10905 Signal damper, for MAP signal, reduces signal pulsing

## SADDLE ADAPTER



- 10751 Saddle adapts o-ring style inlet pressure relief valve to AN fittings, billet aluminum, blue anodized, 6 AN female port, fits valves #10702, #10703, and #10710
- 6156 Fitting, 6 AN male flare x 6 AN male + o-ring, hard anodized
- 6157 Fitting, 8 AN male flare x 6 AN male + o-ring, .390" I.D., plated steel
- 6048 Bulkhead, 8 AN male + o-ring x 6 AN male + nut & o-ring, plated steel

## QUICK RELEASE VACUUM/BOOST REFERENCE KIT



- 10917 Vacuum signal junction block assembly, with barbed outlet fitting, (8) #10912 90 degree quick release inlet fittings, (8) #10911 straight quick release fittings, and 10' of black nylon tubing
- 10918 Tee fitting, quick release, 1/8" x 1/8" x 1/4"
- 10911 Quick release fitting, straight, 1/8" female collet x 10-32 male + o-ring
- 10912 Quick release fitting, 90 degree, 1/8" female collet x 10-32 male + o-ring
- 10915 Tubing, 10', black nylon, .070" I.D. x .125" O.D., fits fittings #10911 and #10912
- 10913 Quick release fitting, straight, 1/4" female collet x 1/8" male pipe thread
- 10914 Quick release fitting, 90 degree, 1/4" female collet x 1/8" male pipe thread
- 10916 Tubing, 10', black nylon, .150" I.D. x .250" O.D., fits fittings #10913 and #10914




## ADJUSTABLE PRESSURE RELIEF VALVE TOWER

Converts GM L-98 T.P.I. pressure relief valve for adjustable operation.

- 10752 Adjustable pressure relief valve tower, blue anodized billet aluminum, includes adjustor screw, vacuum nipple fitting, and spring support tab



© 2008

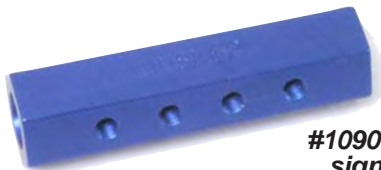

#10901 Vacuum signal block

Kinsler Fuel Injection, Inc.

1834 THUNDERBIRD TROY, MICHIGAN 48084 U.S.A.  
www.Kinsler.com Phone (248) 362-1145 Fax (248) 362-1032