

# CABLES & ACCESSORIES

Excellent for actuating fuel injection manifolds or throttle bodies, carburetors, or shut off valves.

**6" minimum bend radius**  
**50 lb max. pull load**  
**40 lb max. push load**


## THROTTLE CABLES

Heavy duty, push-pull, 10-32 male thread on both ends; uses female rod ends, clevises, or quick release ball pivot.

Sealed on both ends.

Cables are measured tip to tip.

Cable travel is approx. 3.25" to 3.50".

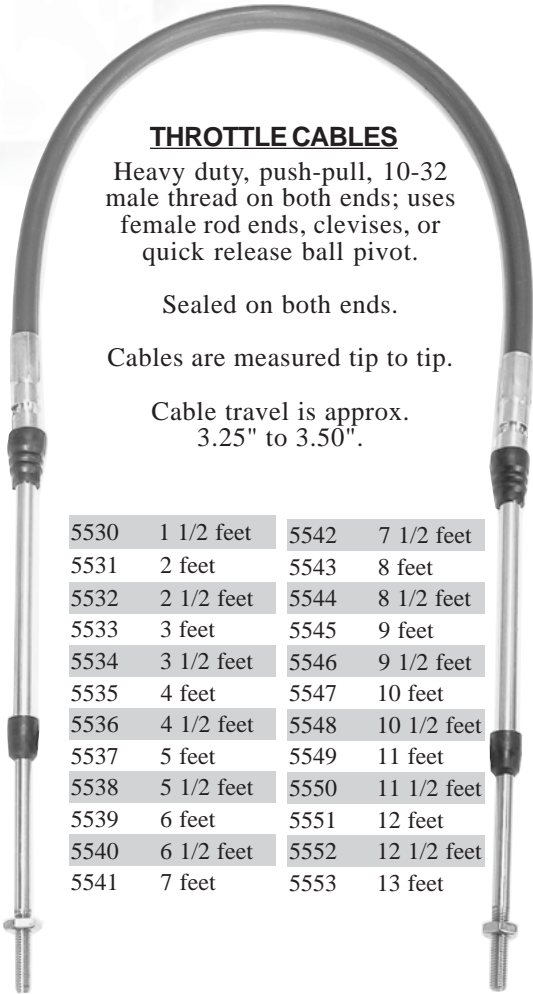

5530	1 1/2 feet	5542	7 1/2 feet
5531	2 feet	5543	8 feet
5532	2 1/2 feet	5544	8 1/2 feet
5533	3 feet	5545	9 feet
5534	3 1/2 feet	5546	9 1/2 feet
5535	4 feet	5547	10 feet
5536	4 1/2 feet	5548	10 1/2 feet
5537	5 feet	5549	11 feet
5538	5 1/2 feet	5550	11 1/2 feet
5539	6 feet	5551	12 feet
5540	6 1/2 feet	5552	12 1/2 feet
5541	7 feet	5553	13 feet

## CABLE BRACKETS

Easy cable mounting to any flat surface.



5435	Single, quick release, stainless steel
5428	Dual, quick release, stainless steel
5436	Bolt down type, cadmium plated steel
5437	U-type, multiple mounting holes, aluminum

## SHUT OFF CABLES


Heavy duty, push-pull, 1/4-20 thread for knob, 7/16-20 bulkhead with jam nut for panel mounting. 10-32 male thread on working end; uses female rod end, clevis, or quick release ball pivot.

Sealed on both ends.

Includes T-handle knob.

Cables are measured tip to tip.

Cable travel is approx. 3.25" to 3.50".

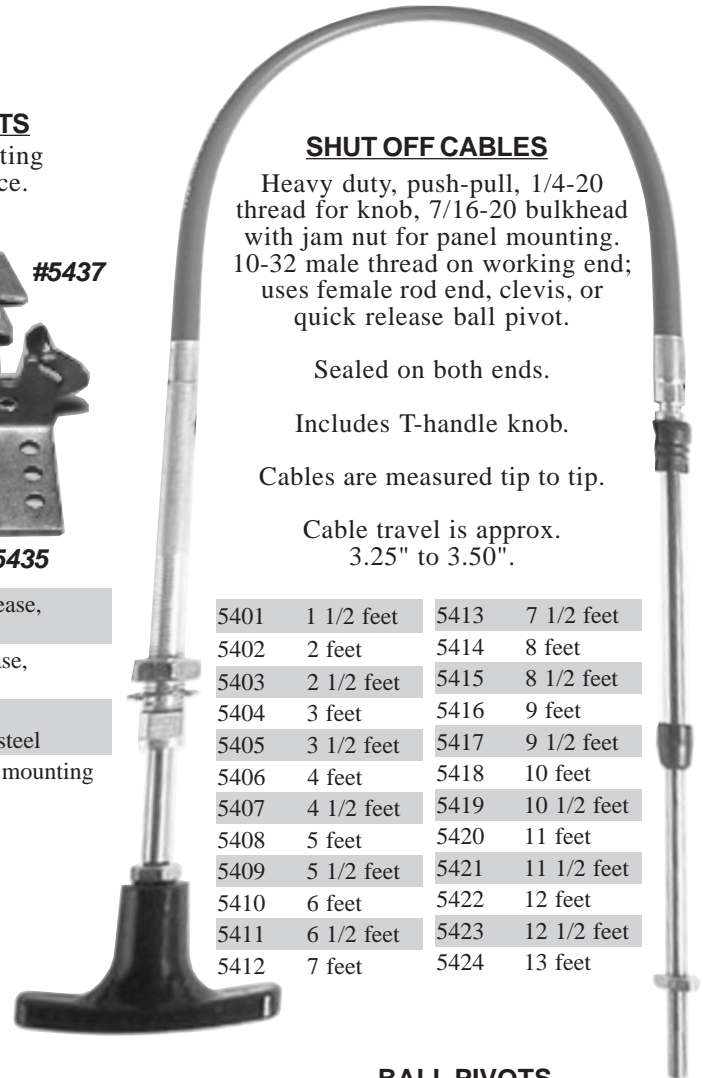

5401	1 1/2 feet	5413	7 1/2 feet
5402	2 feet	5414	8 feet
5403	2 1/2 feet	5415	8 1/2 feet
5404	3 feet	5416	9 feet
5405	3 1/2 feet	5417	9 1/2 feet
5406	4 feet	5418	10 feet
5407	4 1/2 feet	5419	10 1/2 feet
5408	5 feet	5420	11 feet
5409	5 1/2 feet	5421	11 1/2 feet
5410	6 feet	5422	12 feet
5411	6 1/2 feet	5423	12 1/2 feet
5412	7 feet	5424	13 feet

## CABLE HANDLES

Available for 1/4-28 and 10-32 thread, round or t-type.



5429	Round, 10-32 female thread, not printed
5439	T-type, 10-32 female thread, printed 'Shut-Off'
5440	T-type, 1/4-20 female thread, printed 'Shut-Off'
5441	Round, 1/4-20 female thread, not printed


## CLEVISES



5445	10-32 right hand female
5446	10-32 right hand male
5447	1/4-28 right hand female
5448	1/4-28 right hand male
5450	5/16-24 right hand female
5451	5/16-24 right hand male

## BALL PIVOTS

Quick release, includes jam nut for stud.

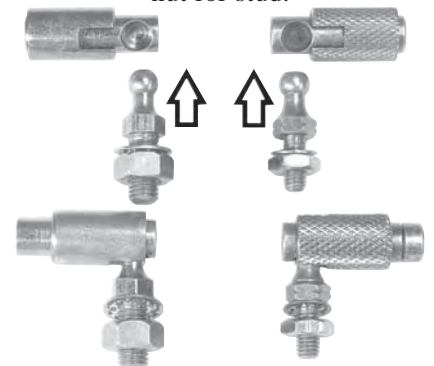

5430	10-32 female x 10-32 male stud
5431	10-32 female x 1/4-28 male stud
5433	1/4-28 female x 1/4-28 male stud

© 2008



*Kinsler Fuel Injection, Inc.*

1834 THUNDERBIRD TROY, MICHIGAN 48084 U.S.A.  
 www.Kinsler.com Phone (248) 362-1145 Fax (248) 362-1032